


Alavanca trava fêmea

Tipo: ATF

Poliamida Reforçada com Fibra de Vidro / Rosca Latão

Desenho Técnico

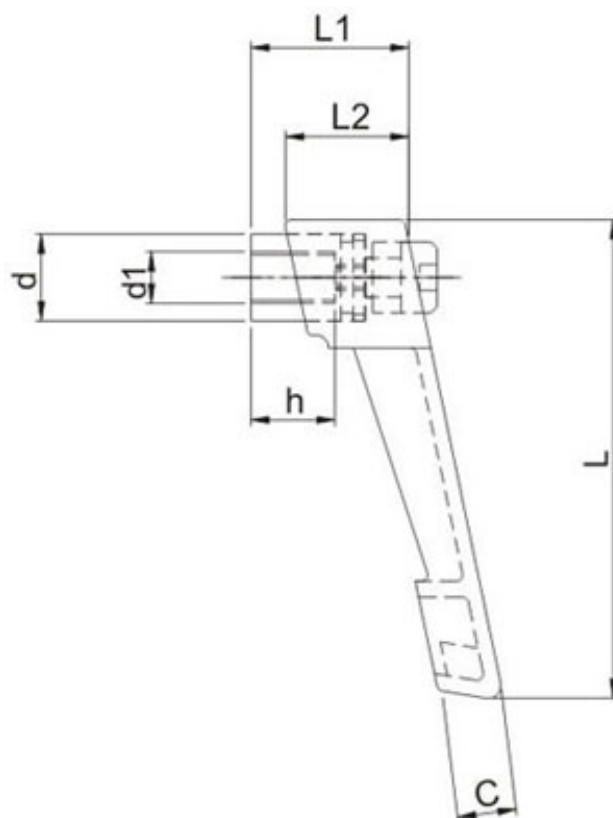

Modelos e Especificações Técnicas

Código	L	L1	L2	d	h	C	d1
ATF 5018-M5	50	22	18	11	10	10	M5x0,8
ATF 5018-M6	50	22	18	11	10	10	M6x1,0
ATF 7520-M6	76	31	26	17	16	13	M6x1,0
ATF 7520-M8	76	31	26	17	16	13	M8x1,25
ATF 11830-M8	118	41	35	22	23	16	M8x1,25
ATF 11830-M10	118	41	35	22	23	16	M10x1,5

**REI-FIX** - Tel. (11) **2602-2626**